


TAN CAR

Technical Data Sheet

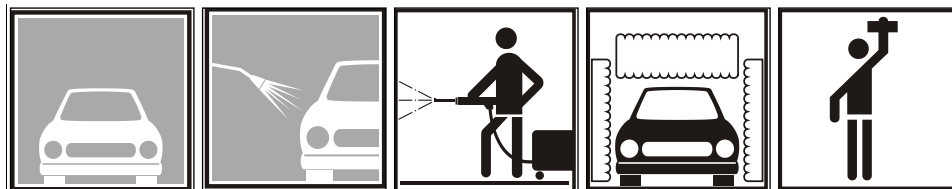

SYMBOL	pH
A-18	14

Alkaline foaming product, designed for frequently cleaning car bodies. Thanks to the unique composition of the product, it is very effective. Excellently removes dirt, dust and other impurities.

APPLICATION:

- passenger, delivery, buses and heavy-goods cars, tarpaulins, engines, construction vehicles, agricultural machines
- stainless steel and aluminium alloys
- car washes

COMPOSITION:

- < 2% sodium hydroxide
- < 5% phosphonates
- < 5% silicates
- < 5% non-ionic surfactants
- < 5% amphoteric surfactants
- auxiliary substances not classified as dangerous

USAGE:

Read product's safety data sheet before using.

Use as a working solution according to the containment level of the surface.

TAN CAR

Technical Data Sheet

Sprinkler:

- vehicles: 1:20 (winter), 1:50 (summer)
- engines: 1:5-1:10
- foaming lance: 1:1 (winter), 1:2 (summer)

In case of very strong pollutions, working solutions may change.

Wash down with water.

Warning: Do not use in full sun or on heated surfaces.

Do not let the product dry off on car paint.

DANGER:



- Causes skin irritation.
- Causes serious eye damage.
- Wear protective gloves/protective clothing/eye protection/face protection.
- IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
- Immediately call a POISON CENTER/doctor

SELL-BY DATE:

36 months from the production date.

Production date/series and expiration date are stated on the packaging.

TAN CAR

Technical Data Sheet

ADDITIONAL INFORMATION:

Additional information can be found in safety data sheet.

Contaminated containers should be completely emptied. Several times rinse the container promptly after emptying. Empty container can be stored in containers for collection of plastic packaging, or can be delivered to specialized company for recycling.

Disposal should be in accordance with the national/international regulations