


TopEfekt® STR

Technical Data Sheet

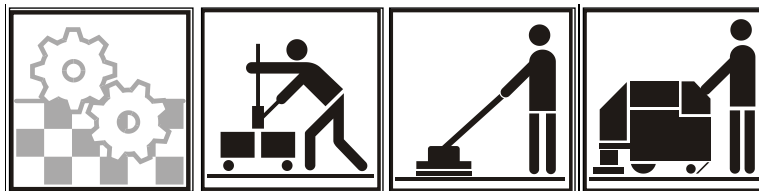

SYMBOL	pH
I-01	13

Low-foaming, alkaline product, designed for mechanical and manual cleaning strongly polluted industrial floors. Dissolves greasy contaminations and oil. May be used as a stain remover for greasy stains on carpet coverings. Recommended for cleaning elastic surfaces such as PVC, linoleum, vinyl and resin.

APPLICATION:

- industrial floors and surfaces resistant to water and alkaline substances
- production halls, warehouses
- staircases, corridors, sports halls

COMPOSITION:

- < 5% phosphates
- < 5% phosphonates
- < 5% non-ionic surfactants
- aroma composition
- auxiliary substances not classified as dangerous
- sodium hydroxide

USAGE:

Read product's safety data sheet before using.

- mechanical cleaning: 100-200 ml / 10 l of water
- manual cleaning: 100-300 ml / 10 l of water
- thorough cleaning: 200-500 ml / 10 l of water

TopEfekt[®] STR

Technical Data Sheet

DANGER:



- Causes skin irritation.
- Causes serious eye damage.
- Wear protective gloves/protective clothing/eye protection/face protection.
- IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
- Immediately call a POISON CENTER/doctor

SELL-BY DATE:

36 months from the production date.

Production date/series and expiration date are stated on the packaging.

ADDITIONAL INFORMATION:

Additional information can be found in safety data sheet.

Contaminated containers should be completely emptied. Several times rinse the container promptly after emptying. Empty container can be stored in containers for collection of plastic packaging, or can be delivered to specialized company for recycling.

Disposal should be in accordance with the national/international regulations